



CAST IRON
Stelar 93

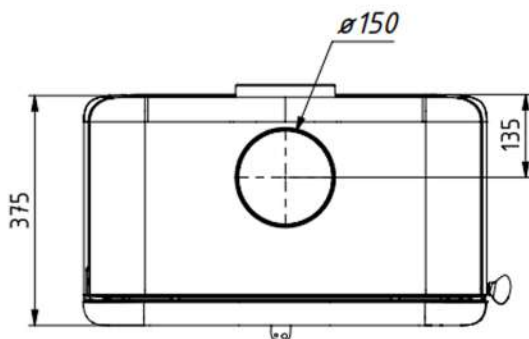

ecoDESIGN Ready!

Efficiency	CO Emissions	NOx Emissions	OGC Emissions	Particles	Heat output range	Nominal HO	Flue socket	Weight	Firewood	Heating vol.	Heating area
80 %	0,10 %	200 mg	120 mg	40 mg	6,5-12 kW	9 kW	Ø 150 mm	145 kg	70 cm	456 m³	182 m²

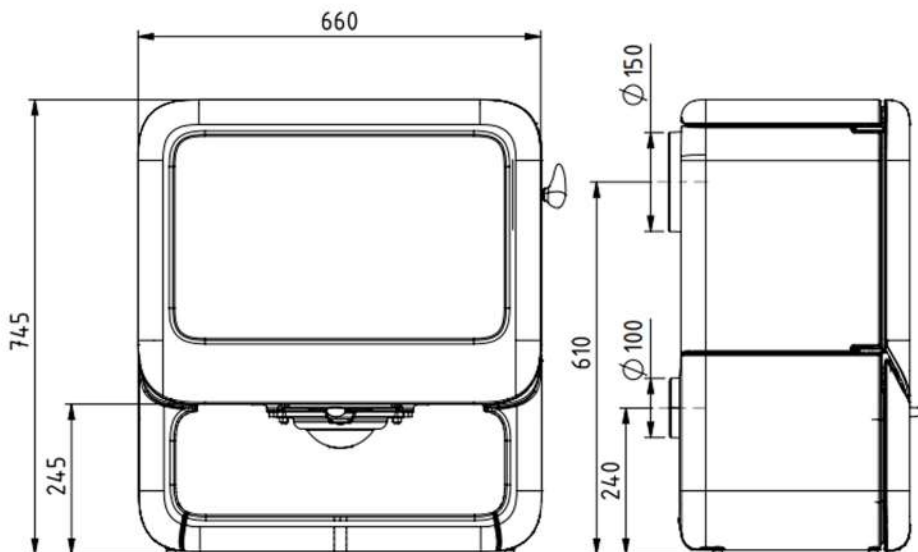

External	660 x 745 x 375 mm
Firebox	570 x 260 x 280 mm
Width x Height x Depth	

- Top or rear flue exit.
- Firebox in vermiculite.
- Natural convection.
- Combustion control single comand.
- Printed glass.
- Secondary air control.
- Option: cast iron kit
- External air intake (Ø 120 mm).



FLAMME ROUGE